

RSP


High Pressure Water Pump Support Package provides rapid pressurization of 2 cylinders alternately or simultaneously at same test pressure.

E/P Regulator provides Computerized Pump Air adjustment (DAP systems only)



Double Acting Pump provides flow by pressurizing on the forward and back stroke which almost doubles pump output capacity

Clean Air Package Cleans Compressor Air to ISO8573 Class 1 Air Extending Life of the pump – Auxiliary Air Port for providing clean dry air to your PCT Inverter

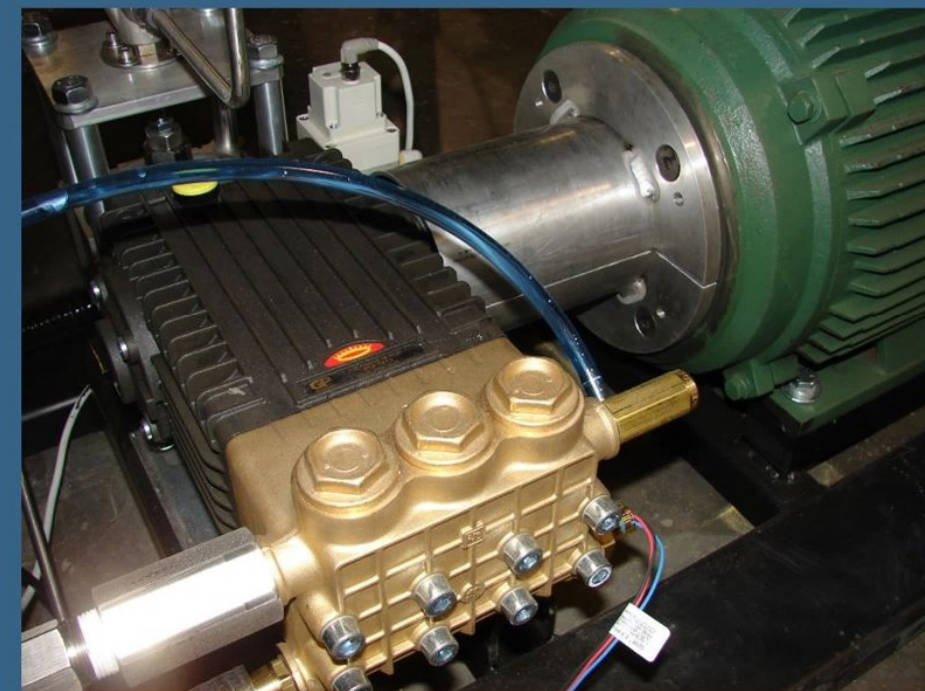

High Flow Electric Motor Driven Packages Available
 12.4gpm@5,800psi
 4gpm@16,000psi

Pressure's Available	flow@50% Capacity	flow@100% Capacity
•RSP45 - 45,000psi	(22,500psi) .21gpm	(45,000psi) .03gpm
•RSP35 - 35,000psi	(17,500psi) .29gpm	(35,000psi) .05gpm
•RSP30 - 30,000psi	(15,000psi) .32gpm	(30,000psi) .1gpm
•RSP25 - 25,000psi	(12,500psi) .37gpm	(25,000psi) .2gpm
•RSP10 - 10,000psi	(5,000psi) 1gpm	(10,000psi) .5gpm
•RSP6 - 6,000psi	(3,000psi) 1.8gpm	(6,000psi) 1gpm
•RSP1 - 1,000psi	(500psi) 7gpm	(1,000psi) 5gpm

•Dimensions.....79cm/31" L x 71cm/28" W x 142.2cm/56" H

•Water..... City Water Pressure

• Air Req..... 90-110 PSI/ 6.2 – 7.6 bar @ / 56CFM / 1.58 Cubic Meters per minute

• Air Reservoir..... 30 gallon/ 113.6 liters @ 175 PSI maximum / 12 bar

•Air Filtration.....5 micron