



Air Hoist GAH

The GAH (Galiso Air Operated Hoist) is preferred by Hydrotesters for its fine variable speed control not found on low end electric hoists.

- The GAH comes with a standard 10 foot chain assembly.
- The GAH Hoist Assembly includes a chain container and pendant control
- Precise variable lifting and lowering speed

Dimension

		<u>1/4 ton</u>	<u>1/2 ton</u>	<u>1 ton</u>
A	In(mm)	15.6(396)	21.4(544)	21.4(544)
A1	In(mm)	3.1(78.8)	3.1(78.8)	3.1(78.8)
C	In(mm)	16.8(427)	23.3(592)	23.3(592)
B1	In(mm)	2-8.6(50-220)	2-8.6(50-220)	2.3-8.6(58-220)
E	In(mm)	8.7(221)	11.5(292)	11.5(292)

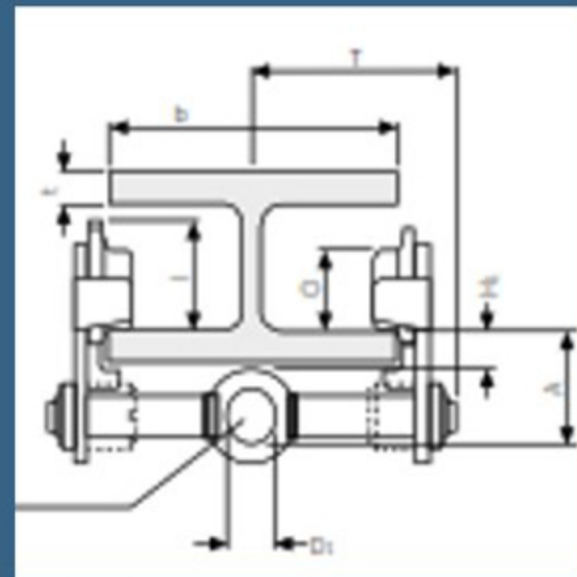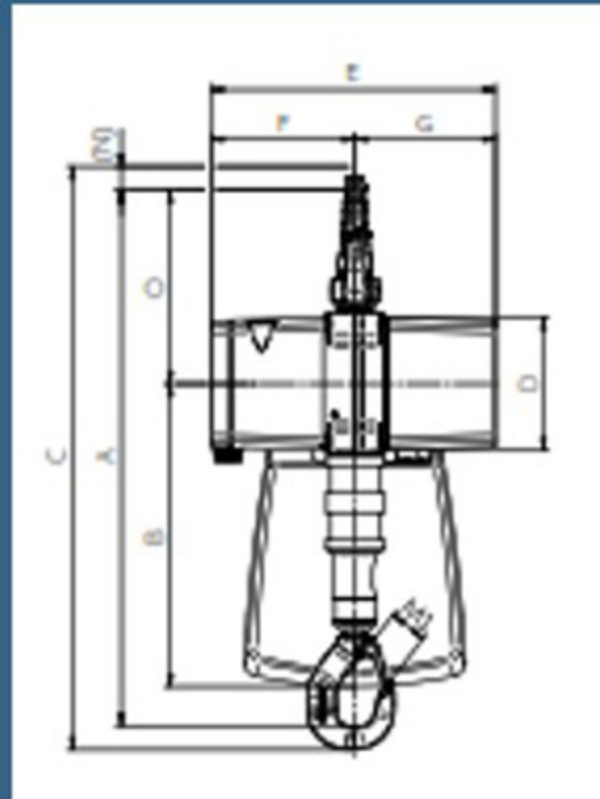

47-11-0039 FRL
(included with 1/4 ton kit only)



	Type	<u>1/4 ton</u>	<u>1/2 ton</u>	<u>1 ton</u>
Capacity	lbs	550	1100	2200
	kg	250	500	1000
Motor output	KW	0.45	1	1
Air Pressure	PSI/Bar	6/87	6/87	6/87
Lifting speed without load	ft/min	65	65	37
	m/min	20	20	11.5
Lifting speed at full load	ft/min	32	41	16
	m/min	10	12.5	6.3
Lowering speed at full load	ft/min	65	65	39
	m/min	20	20	12
Air consumption at full load	cfm	33.5	60	60
	m3/min	.95	1.7	1.7
Air connection	inch	G 3/8"	G 3/8"	G 3/8"
Weight with 10 ft / 3m lift	lbs	22	45	46.2
	kg	10	20.5	21
Chain dimension	mm	4.7 x 14.1	7.4 x 22	7.4 x 22
	lbs/ft	.45	.67	.67
Weight of chain	kg/m	.48	1.1	1.1
	ft		10/16/26	
Height of lifts	m		3 / 5 / 8	
	ft		6.5/13/23	
Length of control at standard lift	m		2 / 4 / 7	
	dB(A)	80	80	80

Sound level at full load²